Magnetic Switches

1 LEAP Technologies

Surface Mount Magnetic Switch

1L-MSM-111

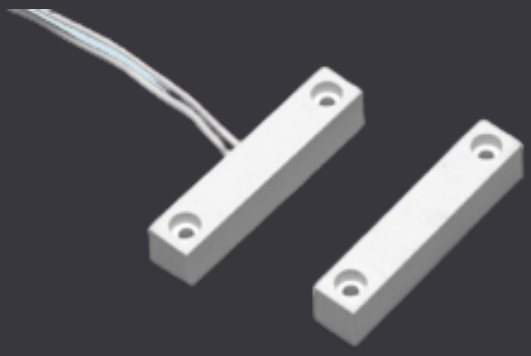

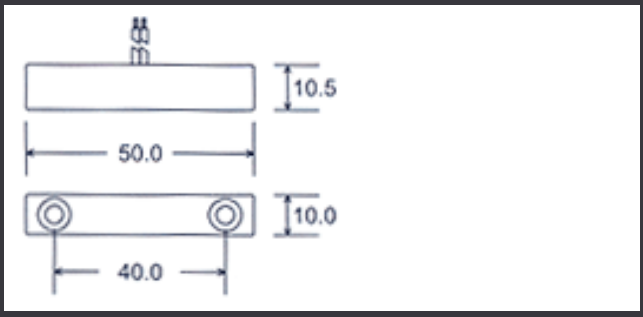

Key Features :-

- Easy Screw & Adhesive tapes (optional) Mounting
- Wide Operating Gap: Min 5/8" (16mm) min.
- 18" Long Wire Leads

Specifications

Electrical

Normally Open Contact Switch (N/O, 1 Form A) For Closed Loop System (N/C, 1 Form B or C/O, 1 Form C is also available on request

Reed Switch Specifications

Contact Rating : 10W/VA
Switching Voltage (Max.) : 200 VDC
Switching Current (Max.) : 0.5 Amp.
Contact Resistance (Min.) : 150 milli ohms
Life Expectancy : 10x 10 6 Operations
Insulation Resistance : 10 9 ohms
Shock Resistance : 30G for 11mSec.
Vibration Resistance : 20G (10 to 1000Hz)
Magnets : ALINCO/ Rare Earth (Unless otherwise specified)
Armour Jacket : Stainless Steel (Type 304)
Plastic Material : ABS Plastic (Unless otherwise specified

1 LEAP Technologies

+91-9911007745 1leaptechnologies@gmail.com www.1leaptechnologies.com