


Magnetic Switches

Surface Mount Magnetic Switch

1L-MSM-113

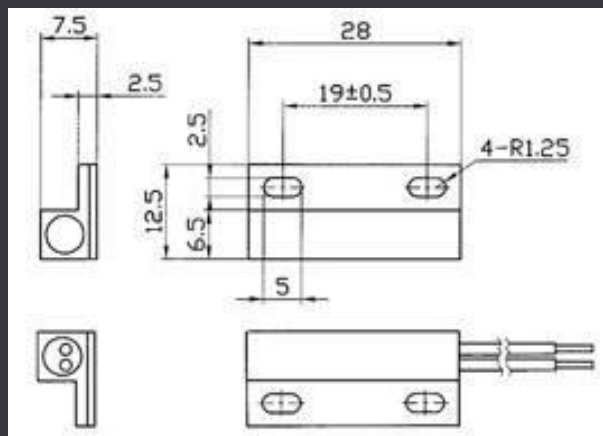

Key Features :-

- Small size, Mini Stick-On contact with flange
- Center leads, 18" leads
- Adhesive and screw mount
- Standard gap: 1" (25mm)
- Switches or magnets are available separately
- Available in open loop, closed loop and SPDT

Specifications

Electrical

Normally Open Contact Switch (N/O, 1 Form A) For Closed Loop System (N/C, 1 Form B or C/O, 1 Form C is also available on request

Reed Switch Specifications

Contact Rating : 10W/VA
Switching Voltage (Max.) : 200 VDC
Switching Current (Max.) : 0.5 Amp.
Contact Resistance (Min.) : 150 milli ohms
Life Expectancy : 10x 10⁶ Operations
Insulation Resistance : 10⁹ ohms
Shock Resistance : 30G for 11mSec.
Vibration Resistance : 20G (10 to 1000Hz)
Magnets : ALINCO/ Rare Earth (Unless otherwise specified)
Armour Jacket : Stainless Steel (Type 304)
Plastic Material : ABS Plastic (Unless otherwise specified)