
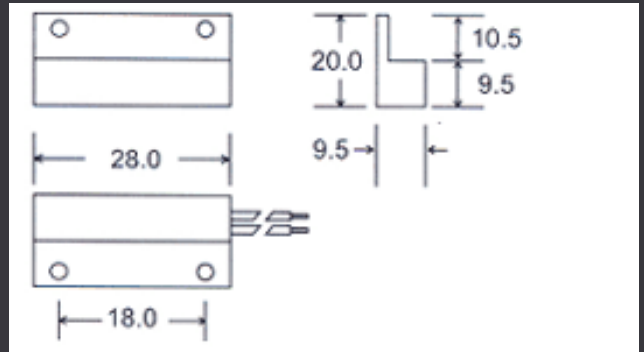


Magnetic Switches

Surface Mount Magnetic Switch

1L-MSM-116

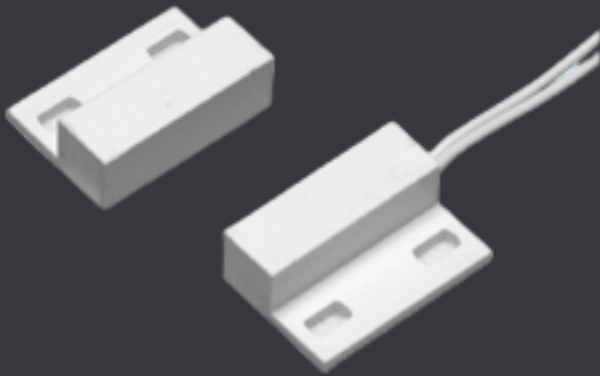

Key Features :-

- Mini Stick-on Surface Mount Contact with side leads
- 18" Long Side Wire Leads
- Adhesive & Screw Mounting
- Operate Gap $\frac{3}{4}$ " Min. (19.0mm)

Specifications

Electrical

Normally Open Contact Switch (N/O, 1 Form A) For Closed Loop System (N/C, 1 Form B or C/O, 1 Form C is also available on request

Reed Switch Specifications

- Contact Rating : 10W/VA
- Switching Voltage (Max.) : 200 VDC
- Switching Current (Max.) : 0.5 Amp.
- Contact Resistance (Min.) : 150 milli ohms
- Life Expectancy : 10×10^6 Operations
- Insulation Resistance : 10^9 ohms
- Shock Resistance : 30G for 11mSec.
- Vibration Resistance : 20G (10 to 1000Hz)
- Magnets : ALINCO/ Rare Earth (Unless otherwise specified)
- Armour Jacket : Stainless Steel (Type 304)
- Plastic Material : ABS Plastic (Unless otherwise specified)