


## Magnetic Switches

### Recessed Mount Magnetic Switch

**1L-MSR-104-H**

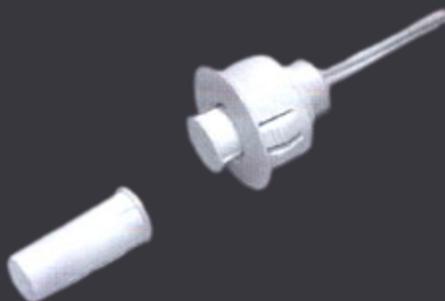

#### **Key Features :-**

- 3/8" Dia with Adaptor Holder
- Easy & Quick Installation
- 3/4" Adaptor / Holder
- Wide Operating Gap 3/4" (19mm) min.

#### **Specifications**

---

##### **Electrical**

Normally Open Contact Switch (N/O, 1 Form A) For Closed Loop System (N/C, 1 Form B or C/O, 1 Form C is also available on request

##### **Reed Switch Specifications**

**Contact Rating :** 10W/VA

**Switching Voltage (Max.) :** 200 VDC

**Switching Current (Max.) :** 0.5 Amp.

**Contact Resistance (Min.) :** 150 milli ohms

**Life Expectancy :** 10x 10<sup>6</sup> Operations

**Insulation Resistance :** 10<sup>9</sup> ohms

**Shock Resistance :** 30G for 11mSec.

**Vibration Resistance :** 20G ( 10 to 1000Hz)

**Magnets :** ALINCO/ Rare Earth (Unless otherwise specified)

**Armour Jacket :** Stainless Steel (Type 304)

**Plastic Material :** ABS Plastic (Unless otherwise specified)