
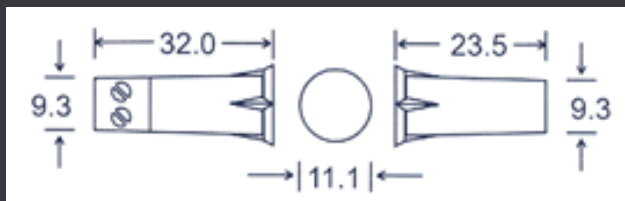


Magnetic Switches

Recessed Mount Magnetic Switch

1L-MSR-105TB

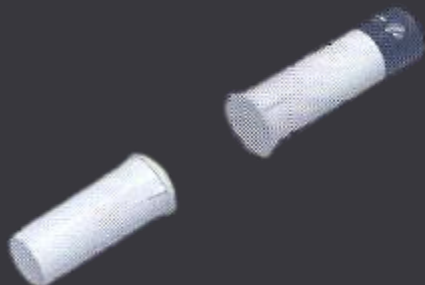

Key Features :-

- 3/8" Dia with terminal connector
- Easy & Quick installation
- No Cable Joints, Better Reliability
- Can use solid or stranded 22 AWG Wire
- Longer Length
- Wide Operate Gap $\frac{3}{4}$ " (19mm) min.

Specifications

Electrical

Normally Open Contact Switch (N/O, 1 Form A) For Closed Loop System (N/C, 1 Form B or C/O, 1 Form C is also available on request

Reed Switch Specifications

- Contact Rating :** 10W/VA
- Switching Voltage (Max.) :** 200 VDC
- Switching Current (Max.) :** 0.5 Amp.
- Contact Resistance (Min.) :** 150 milli ohms
- Life Expectancy :** 10x 10⁶ Operations
- Insulation Resistance :** 10⁹ ohms
- Shock Resistance :** 30G for 11mSec.
- Vibration Resistance :** 20G (10 to 1000Hz)
- Magnets :** ALINCO/ Rare Earth (Unless otherwise specified)
- Armour Jacket :** Stainless Steel (Type 304)
- Plastic Material :** ABS Plastic (Unless otherwise specified)